

The introduction of the Mitel Semiconductor range of 2GHz synthesisers and prescalers for low cost applications such as consumer satellite TV reception has created the requirement for an economic VCO design covering a frequency range from around 1.5GHz to 2.2GHz. Although suitable hybrid oscillator designs are available from various manufacturers, these generally carry a price tag at least an order of magnitude higher than the synthesiser, thus making their use in consumer equipment hopelessly uneconomic.

The design shown in Fig.1 has been developed using low cost components which should be easily available, the varicap diodes being normal UHF TV tuning types and the transistor a standard catalog item.

A major problem when operating at these frequencies is that the series inductance of most capacitors becomes very significant compared with that required in the resonator circuit and also prevents good decoupling. These problems are overcome when designing fixed frequency oscillators by replacing the normal resonant circuits and decoupling capacitors with open or short circuited resonant transmission lines but a design requiring wide frequency variation must use more conventional techniques.

The transistor is biased to about 1.5mA using a 22kΩ resistor from collector to base. Any problems with decoupling at the emitter are avoided by connecting the emitter direct to ground. Stabilisation of the bias point relies on the 330Ω collector load resistor providing a degree of feedback. A small inductor in series with the collector load resistor reduces any loading and improves the effectiveness of the +12V supply

decoupling. A series tuned circuit consisting of a small inductor and two varicap diodes is connected between collector and base with a 390pF capacitor providing DC isolation of the varicap diodes from the collector voltage. To avoid the introduction of any additional series inductance, the varicap diodes are connected direct to the transistor base without a coupling capacitor. The oscillator frequency is varied by adjusting the varicap bias voltage from 0 to 30V via a 47kΩ isolating resistor. Output amplitude from the basic oscillator is much higher than the input requirements of the synthesiser or prescaler and therefore about 10dB of attenuation is provided by a resistive attenuator.

As might be expected with an oscillator operating at this frequency, layout is fairly critical and the layout shown in Fig.2 should be followed accurately or extensive trials made before any variations are attempted. The prototype oscillators were made on standard 1/16 inch fibreglass board, but it was found impossible to mount the frequency determining components on the board without greatly affecting the frequency range available; these components are therefore mounted off board, relying on short lead lengths to provide sufficient rigidity.

OSCILLATOR SPECIFICATION

Operating Voltage: +9V to +14V
 Frequency Range: 1.5GHz to 2.2GHz
 Varicap Voltage Range: 0V to +30V
 Output Level: (with 10dB attenuator) -10dBm (70mV)

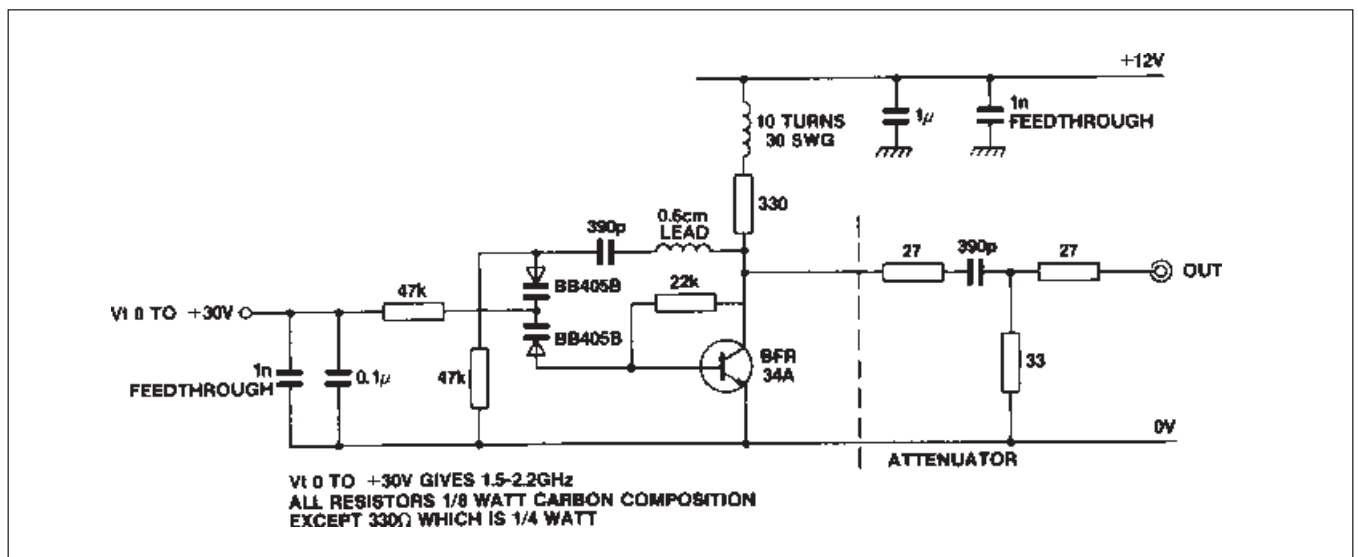


Figure 1: 2GHz VCO Circuit Diagram

A LOW COST 1.5 to 2.2GHz VOLTAGE CONTROLLED OSCILLATOR



SEMICONDUCTOR

Internet: <http://www.mitelsemi.com>

CUSTOMER SERVICE CENTRES

- **FRANCE & BENELUX** Les Ulis Cedex
Tel: (1) 69 18 90 00 Fax: (1) 64 46 06 07
- **GERMANY** Munich Tel: (089) 419508-20 Fax: (089) 419508-55
- **ITALY** Milan Tel: (02) 6607151 Fax: (02) 66040993
- **JAPAN** Tokyo Tel: (03) 5276-5501 Fax: (03) 5276-5510
- **KOREA** Seoul Tel: (2) 5668141 Fax: (2) 5697933
- **NORTH AMERICA** Scotts Valley, USA
Tel: (408) 438 2900 Fax: (408) 438 5576/6231

- **SOUTH EAST ASIA** Singapore
Tel:(65) 333 6193 Fax: (65) 333 6192
- **SWEDEN** Stockholm Tel: 46 8 702 97 70 Fax: 46 8 640 47 36
- **TAIWAN, ROC** Taipei Tel: 886 2 25461260 Fax: 886 2 27190260
- **UK, EIRE, DENMARK, FINLAND & NORWAY**
Swindon Tel: (01793) 726666 Fax : (01793) 518582

These are supported by Agents and Distributors in major countries worldwide.

© Mitel 1998 Publication No. AN160 Issue No. 2.1 July 1993 TECHNICAL DOCUMENTATION – NOT FOR RESALE. PRINTED IN UNITED KINGDOM

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.